

2- yellow door tall safety cabinet Type 90

COMPLIANCE


EN 14470-1, EN 1363-1

ADVANTAGES

- 105-minute fire resistant and made in France
- EN 14470-1 and FM 6050 compliant
- Storage of flammables

BUT ALSO...

- Thermo-expanding seals of the doors
- Locking system
- Holes for the connection to the ventilation
- Normalized labelling provided with the equipment
- Fixation for earthing
- 90-minute fire resistant according to EN 14470-1, and tested until 105 minute
- Tested and approved according to FM 6050
- Tested and approved with ISO 834 fire heating curve by an European laboratory
- Adjustable shelves in height

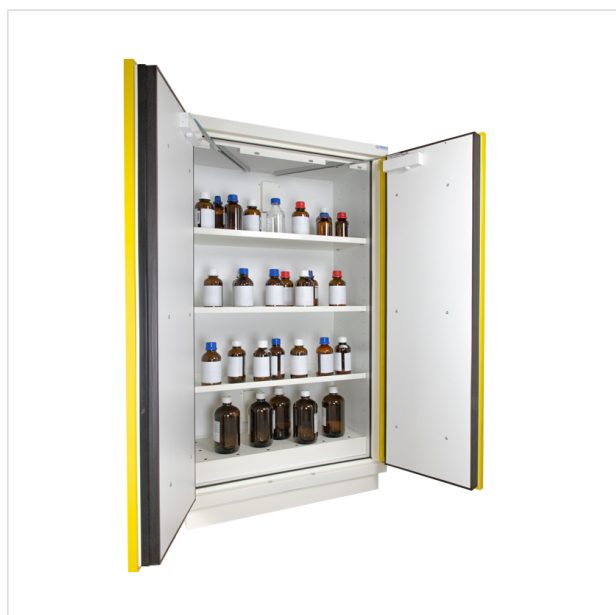

TECHNICAL FEATURES

Model	795+PJE	Shipping dimensions HxWxD (mm)	2150 x 1200 x 800
Compliance	EN 14470-1, EN 1363-1	Ventilation	Both inlet and outlet on the back wall of the cabinet
Cabinet materials	12/10th epoxy painted steel structure	Openings diameter (mm)	100
Doors color	yellow	Connecting sleeve	1
Number of doors	2	Number of compartments	1
Doors type	swing doors	Containment sump	1
Hinges	right & left		453.00
Door closure	self-closing	HS Code	94032080

ADDITIONAL ACCESSORIES RECOMMENDED – FILTRATION OR VENTILATION BOXES

- Filtration box with activated carbon filter for organic vapors (Réf : CDF-A)
- Ventilation box for a connection to the outside (Réf : CDV-A)
- Recirculating air box Labopur - NF X 15-211 (Réf : H50C)
- Connecting kit (Réf : KRC)

OPTIONS

- Containment sump for 2-door cabinets Types 30, 60 & 90 (Réf : B235)
- Perforated cover plate for 2-door safety cabinets Types 30, 60 & 90 (Réf : C235)
- Retention shelf for 2-door safety cabinets Types 30, 60 & 90 (Réf : E35)
- Containment sump in PVC for 1-door or multirisk safety cabinets Types 30, 60 & 90 (Réf : SB148)
- Protection shelf in PVC for 1-door or multirisk safety cabinets Types 30, 60 & 90 (Réf : SE148)
- Sliding drawer for 2-door safety cabinets Types 30, 60 & 90 (Réf : T235)

Model	External dimensions HxWxD (mm)	Internal dimensions HxWxD (mm)	Storage capacity (L)	Containment sump	Shelves	Load capacity	Weight (kg)
795+PJE	1950 x 1137 x 620	1620 x 1000 x 410	250		3	50	453.00